



Sincere / Innovation / Profession
Responsibility / Enthusiasm

彩印 多包裝機

FAC-207 / 209

FAC-207 / FAC-209 Multiple Shrink Packaging Machine (Printed or Transparent Shrinkable Film is Capable)

FYM Color Print Multiple packaging machine features with excellent technology. High quality, simple operation, low maintenance, small size, multi-function and quick change.

Merits :

- The shrinkable film is considerably cheaper than carton. There are no problems in applying bar code on the film. Stable packs and good stacking qualities.
- Good protection for bottles and cans against contamination - clean, sanitary and good moisture resistance. Protection for bottled products against the effects of UV radiation.
- The film can be printed for specific promotional advertising effects, and inserted coupons for sales promotion.
- Encourages the sale of multipacks instead of single products. Products are easily distinguished & managed. PE film can be recycled.
- It's very easy to do arrangement on production line. Simple & clean appearance is the best equipment for GMP factory.
- It's equipped with safety alarm devices including the sealing safety sensor, non-film sensor, upside-down cans sensor and film breakage sensor. There are photo eyes following up the register printed film.
- The machine body is made by painted steel or stainless steel and Aluminum alloy material.
- It's easy & fast to adjust different packing structures.
- The machine is controlled by PLC program, so the actions are smooth. It's simple to operate the control panel.

FAC-207/FAC-209 系列彩印多包裝機 FAC-207 / FAC-209 Multiple Packaging Machine

特別說明:

- 機台操作高度，可配合生產線連線的機台工作高度，本型錄所列為900mm高，如連線高度超過此值，機台高度請往上加。
- 操作箱之方位，可配合線上需求配置。
- 包裝形態若為1x2、1x3、3x4、2x4、2x5或PET瓶之包裝，可另加設計配備。
- 機台產品輸入可另加擾動機構。
- 上方彩印膠膜為表面印刷，下方為透明膠膜。(彩色膜包裝為選購配備)
- 六列或八列入料，一次推送兩包作業。

Special Explanations :

- The standard working height is 900 +/- 50mm. Special working height can be made as per customer's requirement.
- The position of the control cabinet is optional.
- If the pack formation is 1x21x33x42x42x5 or PET bottles, the machine can be additionally designed.
- The infeed conveyor can be additionally equipped with agitator to assist its feeding.
- The upper film is surface printed film, the lower one in transparent film.
- 6 or 8 Channels (Streams) In-feed, to shrink wrap 2 packages of each push.

FAC 系列規格表 / FAC SERIES SPECIFICATION :

機型 Model	包裝型態 Packing Matrix	包裝尺寸 Packing Size (W.xH.) mm	材質 Material PE / LDPE	包裝能量(包/分) Packing Speed (Packs/min.)	適用產品類 Applications	空壓源 Air Pressure	機械尺寸(長x寬x高) M/C Dimension L x W x H (mm)	機械重量 Weight KGS
FAC-207	2x2 x 2x3	最大 Max.	彩色膜 Printed Film	易拉罐 Can : 28~30 寶特瓶 Pet Bottles : 24~26	易拉罐、玻璃瓶 塑膠瓶、PET瓶	5~6 kg/cm ²	2270x1150x1765	650
FAC-207T	2x2 x 2x3	210x150x225	透明膜 Transparent Film	易拉罐 Can : 32~36 寶特瓶 Pet Bottles : 26~28	Cans, Glass Bottles, Pet Bottles or Plastic Bottles	5~6 kg/cm ²	2270x1150x1765	650
FAC-209	2x2 x 2x3	最大 Max.	彩色膜 Printed Film	易拉罐 Can : 24~26 寶特瓶 Pet Bottles : 22~24		5~6 kg/cm ²	2270x1150x1765	800
FAC-209T	2x2 x 2x3	280x250x225	透明膜 Transparent Film	易拉罐 Can : 26~28 寶特瓶 Pet Bottles : 24~26		5~6 kg/cm ²	2270x1150x1765	800

FM 系列規格表 / FM SERIES SPECIFICATION :

機型 Model	規格 Size	包裝尺寸 Packing Size (W.xH.) mm	包裝能力(公尺/每分) Packing Ability (Meter/Min)	電源 Power	耗電量 Power Consumption	內爐尺寸(長x寬x高) Inner Tunnel L x W x H (mm)	機械尺寸(長x寬x高) Tunnel Overall L x W x H (mm)
FM-6030L	450 x 275		1-10M	220V / 380V	15~19.5 KW	1200x600x300	1800x800x1520
FM-7540L	600 x 320		1-10M	220V / 380V	15~19.5 KW	1200x750x400	1800x950x1620
FM-9040L	700 x 320		1-10M	220V / 380V	19.5~24 KW	1200x900x400	1800x1100x1620

特點:



- 透明膠膜及彩色印刷定位版面均可使用。
- 本機適合PE彩色膠膜包裝，讓產品更俱有附加價值。
- 包裝型態多樣化，符合量販潮流。
- 包裝速度快，與生產線相連接運作。
- 不傷品質，節省電力，增加利潤。
- 熱縮爐熱輻射均勻，輸送機為小滾筒組合帶動，經久耐用。
- 特為彩色膠膜收縮之爐內導風設備，不論彩色或透明膠膜收縮後之產品，平整美觀。
- 輸送速度微調，溫度自動控制，操作容易。
- 滾筒加套矽橡膠耐熱管，膠膜不易沾黏。

Features :

- Register printed or unprinted shrinkable film can choose.
- The machine is the most suitable for PE printed material to make the great value of products.
- Various pack formations can meet the trend of wholesale.
- Fast packing speed can match the production line prosperously.
- To assure the quality without being damaged, to save electricity and to increase profits.
- Heat oven for contracting will send out even heat radiation. Delivery is done by rollers with durability.
- Special air flow directional construction for color / non- color film, can shrink products beautifully and smoothly.
- Variable speed tunnel conveyor, automatic thermostat controls, simple operation.
- Silicone rubber coated conveyor belt rods.

包裝流程圖

Packing Flow

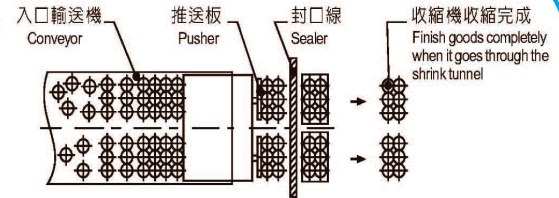

機械尺寸圖 M / C Dim. Illustration

