

FALC-6020-2 全自動排列計數入袋封口機 Auto Counting, Grouping And Shrink Packaging Machine

特點:

- 商品大小容易調整，操作簡便，自動控制，無須熟練人員即可操作，提高生產效果。
- 集體包裝，可節省可觀的包裝材料費，節省人力，降低生產成本。
- 無論方形、圓形、扁型均可完美包裝。採用此機械產品底部無須再用紙盒墊底（自動分裝組合）。
- 機體結構堅固，防鏽烤漆處理，線條分明，造型美觀、耐用。
- 突破傳統，機械作業，以機電合一，增加生產能力，可配合電腦程序作業或PLC程控連結生產線使用最佳。
- 包裝材料：PE、PVC、OPP均適合使用。
- 適用例：玻璃瓶、塑膠瓶、鋁罐、鐵罐、紙盒類、硬體類……等適合包裝。

Features:

- Easy to adjust for different packing sizes, simple operation, automatic control, and it can be operated by unexperienced worker to raise production efficiency.
- To pack collectively to save packing materials and labor so as to lower cost
- Available to pack for square, flat or round commodities, etc. With perfect & beautiful effects. Without paper box to cushion for the bottom of commodities which are being packed.
- Machine outward stranger with rustproof & backing treatment, thus it is beautiful & durable.
- To breakthrough traditional operating procedures, it adopts of electrical system to increase output capacity. Can be used with computer operation or PLC program controller connect with production line.
- Packing materials: available for PE, PVC, & OPP.
- Usage: for glass bottle, plastic bottle, aluminum can, iron can, paper box, etc, including hard shells.

FALC-6020-2 規格表 / FALC-6020-2 SPECIFICATION:

規格 SPECIFICATION		機型 MODEL	FALC-6020-2	FALC-9030-2
包裝尺寸(公厘) Packing Size(mm)	最長 X 最短 Max. L x Min. L		400 x 200	700 x 200
	最寬 X 最窄 Max. W x Min. W		350 x 60	550 x 60
	最高 X 最低 Max. H x Min. H		180 x 50	280 x 50
包裝能量(次/分) Packing Capacity (time/min.)			5-15	5-15
電源 Power			220V x 0.6KW	220V x 0.8KW
空氣壓力 Air Pressure			5kg / cm ²	5kg / cm ²
機械尺寸(長x寬x高) Machine dimension (LxWxH)			1300 x 1150 x 1600	1500 x 1450 x 1600
重量 Weight			300kgs	400kgs

- 除上方標示之一般規格外，特殊規格可另設計規劃。
- In addition to above-mentioned sizes, we make other special sizes on request.
- 機械尺寸之寬度，包括入口輸送帶300mm/長。
- Machine width including inlet conveyor belt is 300 mm.

FM-4525 PE 收縮機 PE, SHRINK TUNNEL

特點:



- 機械輕巧、不佔空間、使用方便。
- 不傷品質、節省電力、增加利潤。
- 熱縮爐熱輻射均勻，輸送以滾筒帶動，經久耐用，速度快慢由DC馬達控制調整。
- To assure the quality without being damaged, to save electricity and to increase profits.
- Heat oven for contracting will send out even heat radiation. Delivery is done by roller with durability. And the speed is controlled and driven by DC motor.

Features:


FM 系列規格表 / FM SERIES SPECIFICATION:

機型 Model	規格 Size	包裝尺寸 (W.xH.) mm	包裝能力(公尺/每分) Packing Ability (Meter/Min)	電源 Power	電熱 Electric Heating	機械尺寸 長x寬x高 Dimension L x W x H (mm)
FM - 4525		300 x 220	1-10M	220V	8KW	1500 x 650 x 1400
FM - 6030L		450 x 270	1-10M	220V	9KW	1800 x 800 x 1500
FM - 7530L		600 x 270	1-10M	220V	10KW	1800 x 950 x 1500

全自動集體排列計數封口包裝流程 Fully-Auto Collecting, Arranging, Counting & Packing Flow

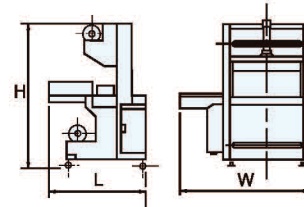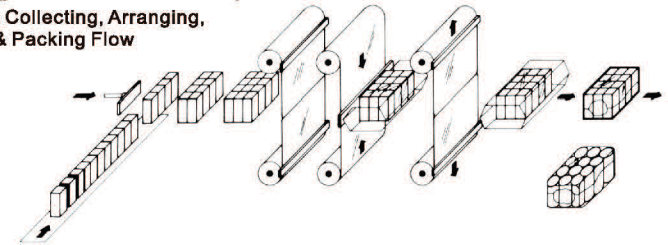

機械尺寸圖
M / C Dim. Illustration

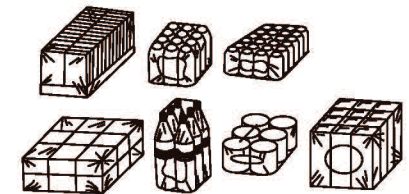

集體包裝方式圖例
Example of collective packaging

鋒源機械有限公司

FUNG YUAN MACHINERY CO., LTD.

公司：台中市豐原區圓環北路二段321號

工廠：台中市豐原區東北街187號

Office : No.321, Sec.2, Yuan Hwan North Rd., Feng Yuan Dist.,
420 Taichung City, Taiwan

Factory : No.187, Tung Pei St., Feng Yuan Dist., Taichung, Taiwan

TEL : 886-4-25232986, 25227318, 25253217-8 FAX : 886-4-25276828

Http : //www.fungyuan.com

E-mail : fungyuan@ms25.hinet.net