

# Saturn S6

Automatic rotary ring stretch wrapper

HIGH  
CAPACITY  
UP TO  
**120**  
pallets/hour

THE MOST VERSATILE





**MOVITEC**  
PALLET WRAPPING TECHNOLOGY

we dare to try anything







- + **HIGH CAPACITY: up to 120 pallets/hour**
- + Maximum quality, high performance and minimum maintenance
- + It is the most versatile: it can evolve to a Saturn S8 model to get higher capacities
- + The load remains static: the film reels rotate around the load
- + Guaranteed savings of stretch film: 300% film pre-stretching
- + 1 m of film becomes 4 m
- + Finishing without tails of film thanks to our efficient cut and welding device
- + Electronic and self-adjusting tension control depending on the profile of the load
- + Possibility of applying efficient dustproof and rainproof wrappings
- + Possibility of wrapping at ground level
- + Capable of applying bands (strips) at any height of the load

### Standard equipment

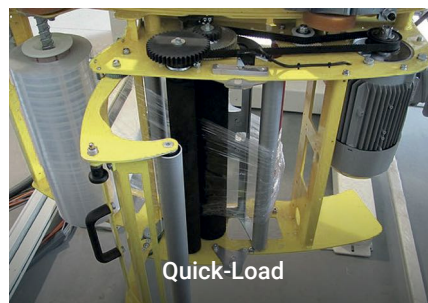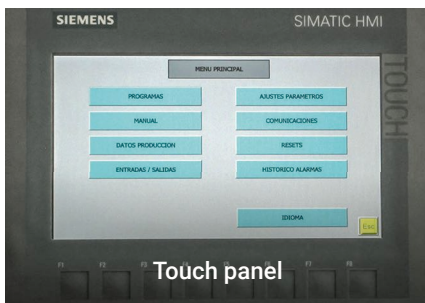

### Optionals

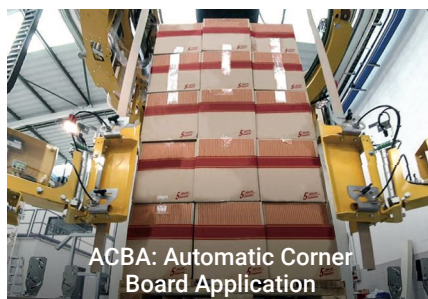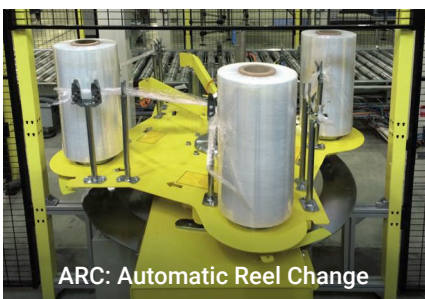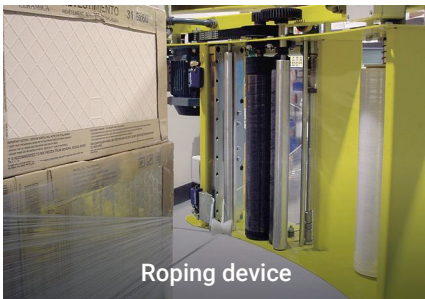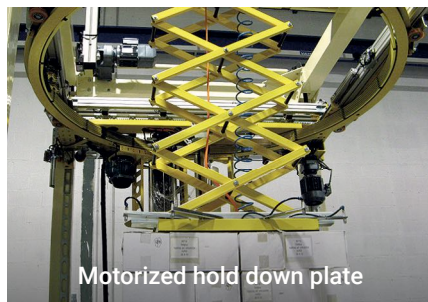



# Saturn S6



**HIGH  
CAPACITY  
UP TO  
120  
pallets/hour**


# Saturn S6

Automatic rotating ring stretch wrapping machine



		D17	D20	D23	D26	D29
<b>PRODUCTION</b>	Maximum capacity (p/h)	120	110	90	85	75
<b>MACHINERY DIMENSIONS</b>	A (mm)	7000			10000	
	B (mm)	2000			3000	
	C (mm)	3000			4000	
	D (mm)	2000			3000	
	E (mm)	3600	3800	4260	4560	
	F (mm)				4200 *	
	G (mm)				2600 *	
	H (mm)	2300	2500	3150	3450	
<b>LOAD DIMENSIONS</b>	Maximum width (mm)	1100	1300	1500	1800	
	Maximum diagonal (mm)	1750	2050	2300	2600	2800
	Maximum height (mm)	2100 (onveyors height 500 mm) *				
<b>POWER SUPPLY</b>	Voltage	400 V 3P + N + PE 50 Hz				
	Compressed air pressure (bar)	6				
<b>STRETCH FILM</b>	Maximum height (mm)	500				
	Maximum diameter (mm)	250				
	Inner core diameter (mm)	76				
	Film thickness (μ)	up to 35				
<b>TOP FILM</b>	Maximum height (mm)	1600	1800	2000	2400	
	Maximum diameter (mm)	300				
	Inner core diameter (mm)	76				
	Film thickness (μ)	40				

\* Possibility to adapt the frame of the machine for loads higher than 2100 mm

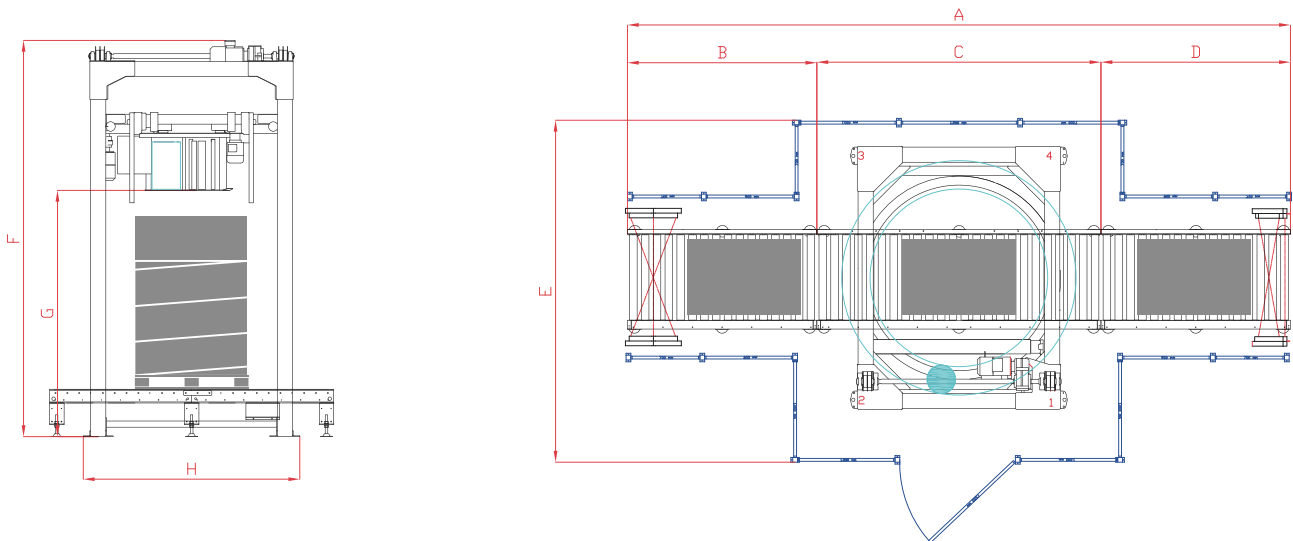

**MOVITEC**  
PALLET WRAPPING TECHNOLOGY



[X](#) [v](#) [in](#) [G+](#) [t](#) [www.movitec-ws.com](http://www.movitec-ws.com)

C. Pallars Sobirà, 16 · Pol. Industrial La Nora · 25660 · Alcoletge [Lleida] · SPAIN  
Tel.[+34] 973 184 059 · Fax [+34] 973 184 008 · comercial@movitec-ws.com