




- Name: Nonwoven Fabric Extrusion Line

★ Common specifications:

Model	YF-S1600	YF-S2400	YF-S3200
Width of fabric	1600mm	2400mm	3200mm
Daily output	5Tons	7-8Tons	8-9Tons
Diameter of main screw	135mm	150mm	170mm
L/D Ratio of main screw	30:1	30:1	30:1
Screw for waste recycling	105mm	105mm	105mm
L/D Ratio of screw for waste recycling	15:1	15:1	15:1
Installation power	400kw	500kw	800kw
Installation dimension (L×W×H)	7×9×11m	7.8×9×11m	8.6×9×11m
Remark: embossing rollers with point pattern, cross pattern, or line pattern can be made-to			

order.Adjustable range of weight/m². 9-250g/m²

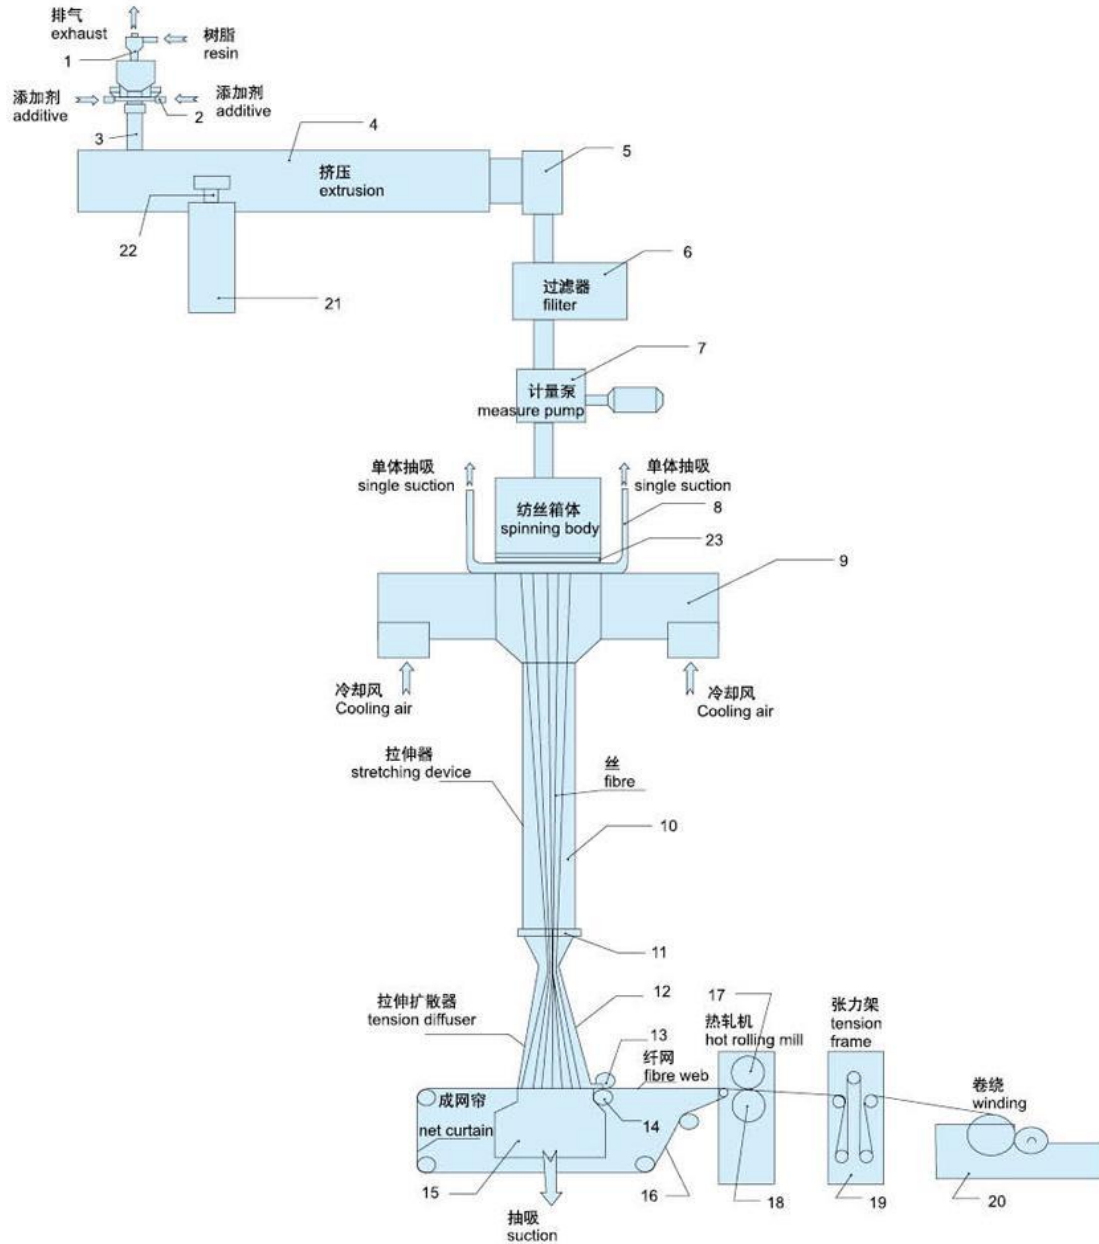

★ Flow Chart of PP Spunbonded Fabric Production Line

SCPPE OF UNDERTAKING PROJECT

- ◆ Design for spunbonded fabric production
- ◆ Design for equipment that makes spunbonded fabric
- ◆ Installation debugging for spunbonded fabric production
- ◆ Debugging for technology for spunbonded fabric production line
- ◆ Coeollary equipment for spunbonded fabric production
- ◆ Technical cprrection for spunbonded fabric production

